

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
WO 2004/029685 A1

(51) International Patent Classification<sup>7</sup>: G02B 6/42,  
7/00, 7/02, 7/182, G11B 7/13

J., M. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number:  
PCT/IB2003/004187

(74) Agent: SCHRIJNEMAEEKERS, Hubert, J., M.; Philips  
Intellectual Property & Standards, Prof. Holstlaan 6,  
NL-5656 AA Eindhoven (NL).

(22) International Filing Date:  
23 September 2003 (23.09.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02078999.6 27 September 2002 (27.09.2002) EP

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (*for all designated States except US*): KONIN-  
KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): VULLERS, Rudolf,

[Continued on next page]

(54) Title: OPTICAL ELEMENT, METHOD FOR MANUFACTURING SUCH AN ELEMENT AND A METHOD FOR ALIGN-  
ING A LIGHT BEAM AND SUCH AN ELEMENT

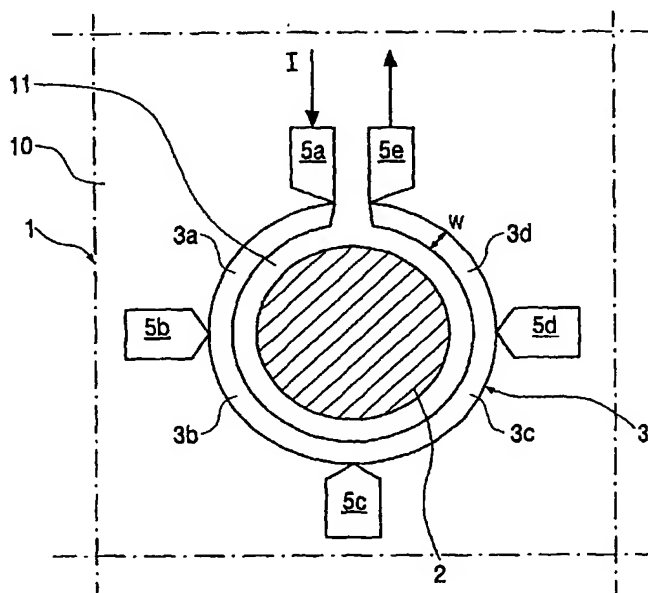

(57) Abstract: Optical element, provided with a receiving plane (10) comprising a receiving section (11) for receiving at least one light beam (2), wherein the receiving plane (10) is provided with at least one light-detection element (3) being arranged to detect whether at least part of said light beam is projected thereon. Further, the invention relates to a method for manufacturing an optical element, wherein the optical element substrate is provided with the at least one light-detection element, using at least one thin layer deposition technique.

WO 2004/029685 A1